

# T.I.S.

## Art. B043 TIS

### VALVOLA A FLUSSO AVVIATO PN16



#### GLOBE VALVE ON-OFF TYPE PN16

#### APPLICAZIONE:

Installazioni acqua e vapore.

#### APPLICATION:

Suitable for water and steam.

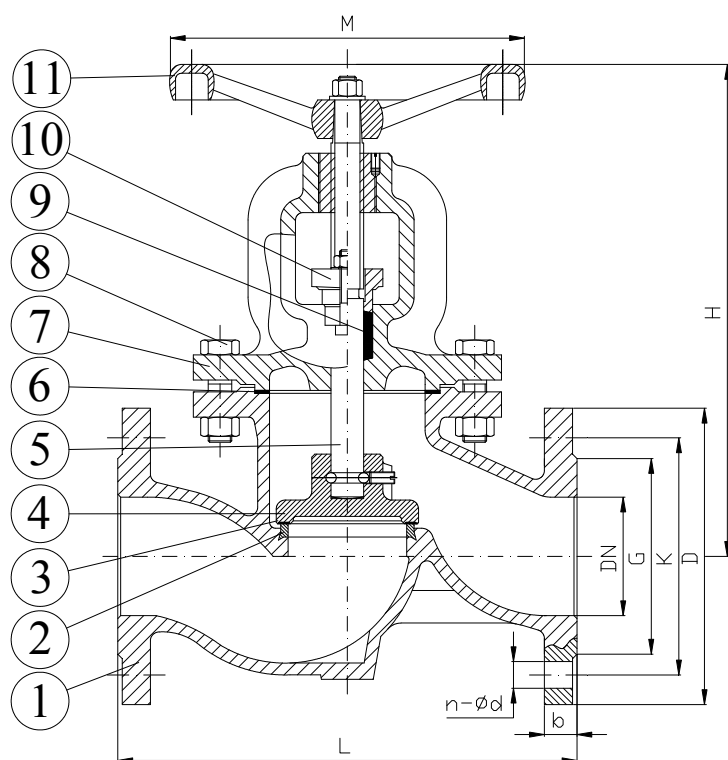

<b>NORMA PROGETTO:</b>	EN 1074-1
<b>SCARTAMENTO:</b>	EN 558 Serie 1
<b>FLANGE:</b>	EN 1092-2
<b>COLLAUDI:</b>	EN 12266-1
<b>GRADO DI TENUTA:</b>	Rate B
<b>PRESS. ESERCIZIO:</b>	16 bar ≤ +120°C, 11 bar ≤ +160°C, 9 bar ≤ +200°C
<b>DESIGN STANDARD:</b>	EN 1074-1
<b>FACE TO FACE:</b>	EN 558 Series 1
<b>FLANGES:</b>	EN 1092-2
<b>TESTS:</b>	EN 12266-1
<b>LEAKAGE RATE:</b>	Rate B
<b>WORKING PRESS.:</b>	16 bar ≤ +120°C, 11 bar ≤ +160°C, 9 bar ≤ +200°C

DENOMINAZIONE PART	MATERIALI MATERIALS
1 <b>CORPO BODY</b>	EN-GJL 250 EN-GJL 250
2 <b>TENUTA CORPO BODY SEAL RING</b>	ACCIAIO INOX STAINLESS STEEL
3 <b>TENUTA DISCO DISC SEAL RING</b>	ACCIAIO INOX STAINLESS STEEL
4 <b>OTTURATORE OBTURATOR</b>	EN-GJL 250 EN-GJL 250
5 <b>ASSE STEM</b>	ACC.INOX AISI420 (EN 1.4021) SS AISI420 (EN 1.4021)
6 <b>GUARNIZIONE GASKET</b>	GRAFITE GRAPHITE
7 <b>CAPPELLO BONNET</b>	EN-GJL 250 EN-GJL 250
8 <b>VITE E DADO BOLT &amp; NUT</b>	ACCIAIO ZINCATO GALVANIZED STEEL
9 <b>GUARNIZIONE GASKET</b>	GRAFITE GRAPHITE
10 <b>PREMISTOPPA PACKING GLAND</b>	EN-GJL 250 EN-GJL 250
11 <b>VOLANTINO HANDWHEEL</b>	EN-GJL 250 EN-GJL 250

DN	D	K	G	b	n-ød	L	H	M	W(kg)
15	95	65	46	14	4-14	130	160	80	3.4
20	105	75	56	16	4-14	150	165	80	3.8
25	115	85	65	16	4-14	160	190	100	5.1
32	140	100	76	18	4-19	180	210	120	8
40	150	110	84	18	4-19	200	220	140	9.4
50	165	125	99	20	4-19	230	235	140	11.4
65	185	145	118	20	4-19	290	275	160	18
80	200	160	132	22	8-19	310	335	240	30.7
100	220	180	156	24	8-19	350	375	240	40
125	250	210	184	26	8-19	400	425	280	62
150	285	240	211	26	8-23	480	490	320	91
200	340	295	266	30	12-23	600	620	360	153
250	405	355	319	32	12-28	730	705	400	210

**COLORE:** Grigio RAL 7015.

**COLOUR:** Grey RAL 7015.